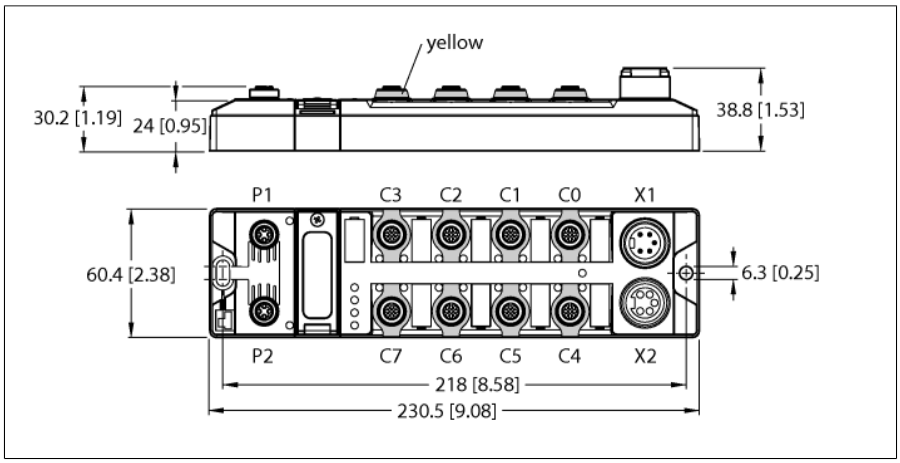
Compact PROFIsafe / PROFINET Block I/O Module
Safe Digital Inputs and Outputs
TBPN-L5-4FDI-4FDX





Type	TBPN-L5-4FDI-4FDX
ID	100001826
Supply	
Supply voltage	24 VDC
Admissible range	20.4…28.8 VDC
Voltage supply connection	7/8″, 5-pin
Electrical isolation	galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC
Power dissipation, typical	≤ 5 W
System data	
Fieldbus transmission rate	100 Mbps
Fieldbus connection technology	2 × M12, 4-pin, D-coded
Web server	integrated
Service interface	Ethernet via P1 or P2
PROFINET	
Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
Safety Data	
PL acc. to EN ISO 13849-1	Level e
Category acc. to DIN EN 13849-1:2008	4
SIL acc. to IEC 61508	3
Useful Lifetime	20 years (EN ISO 13849-1)

- PROFINET device
- Integrated Ethernet switch
- 100 Mbps supported
- 2 × M12, 4-pin, D-coded, Ethernet fieldbus connection
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- 5-pin 7/8″ male connector for power supply
- ATEX zone 2/22
- CCC-Ex
- Four secure digital SIL3 inputs
- Four secure configurable digital SIL3 inputs or outputs

Figure 1

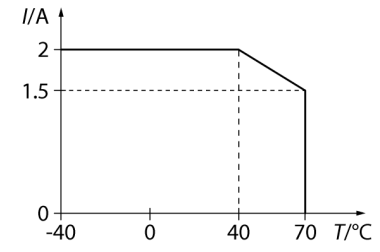
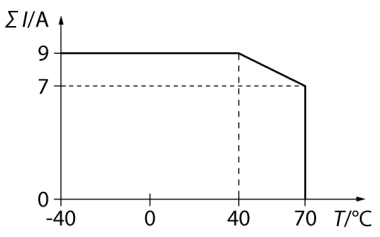


Figure 2



Edition • 2025-02-26T11:57:04+01:00

Safety Inputs OSSD	
Low-level signal voltage	EN 61131-2 Type 1 (< 5 V; < 0.5 mA)
High-level signal voltage	EN 61131-2 Type 1 (> 15 V; > 2 mA)
Max. OSSD supply per channel	2 A per C0 to C7, 1.5 A at 70 °C Please consider derating as shown in figure 1
Max. tolerance test pulse width	1 ms
Interval between 2 test pulses, minimum	20 ms at 1 ms test pulse width 15 ms at 0.5 ms test pulse width

Safety Inputs floating/antivalent	
Max. loop resistance	< 150 Ω
Max. cable length	max. 1 µF at 150 Ω limited by line capacity
Test pulse, typical	0.6 ms
Test pulse, maximum	0.8 ms
Sensor supply	Power supply V AUX1/T1 max. 2 A Please consider derating as shown in figure 1
Interval between 2 test pulses, minimum	900 ms
Additional information	No connection to external potential allowed

Safety Outputs	
Output current in off state	< 5 V
Output current in off state	< 1 mA suitable for inputs according to EN 61131-2 Type 1
Test pulse, typical	0.5 ms
Test pulse, maximum	1.25 ms
Interval between 2 test pulses, typical	500 ms
Interval between 2 test pulses, minimum	250 ms
Actuator power supply	Power supply V AUX1/T1 max. 2 A Please consider derating as shown in figure 1
Max. output current	2 A (resistive) 1 A (inductive)
Additional information	The load must be mechanically or electrically inert to tolerate the test pulses. When configured as a PPM switching output the negative pole of the load should be wired to the M-terminal of the corresponding output (Pin 2).

Connectivity inputs	M12, 5-pin
Input delay	2.5 ms

Connectivity outputs	M12, 5-pin









Edition • 2025-02-26T11:57:04+01:00

Standard/Directive conformity	
Directive	2006/42/EC Machine Directive 2014/35/EC Low Voltage Directive 2014/30/EC EMC Directive
Vibration test	Acc. to EN 60068-2-6 Acceleration up to 20 g
Shock test	acc. to EN 60068-2-27
Drop and topple	acc. to EN 60068-2-31/IEC 60068-2-32
Electromagnetic compatibility	Acc. to EN 61131-2
Approvals and certificates	CE UKCA ATEX zone 2/22 CCC-Ex FCC statement, UV resistant acc. to DIN EN ISO 4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, Encl.Type 1 IND.CONT.EQ.
Note on ATEX/IECEx	The Quick Start Guide with information on use in Ex areas must be observed.

General Information	
Dimensions (W x L x H)	60.4 x 230.5 x 38.8 mm
Ambient temperature	-40…+70 °C
Storage temperature	-40…+85 °C
Altitude	Max. 5000 m
Protection class	IP65 IP67 IP69K
Housing material	PA6-GF30
Housing color	Black
Connector material	Nickel-plated brass
Window material	Lexan
Material screw	303 stainless steel
Material label	Polycarbonate
Halogen-free	yes
Mounting	2 mounting holes □ 6.3 mm

The data sheet serves as advance information. For definitive values see the corresponding product manual. In this respect, no liability for completeness and accuracy can be applied to the content of this data sheet.

Edition • 2025-02-26T11:57:04+01:00

	**Note** Ethernet cable (example): RSSD-RSSD-441-2M/S2174 Ident. no. 6914218	M12 × 1 Ethernet  
	**Note** Actuator and sensor cable/PUR connection cable (example): RKC4.5T-2-RSC4.5T/TXY Ident. no. 6629805	M12 × 1 Safety Inputs 
	**Note** Actuator and sensor cable/PUR connection cable (example): RKC4.5T-2-RSC4.5T/TXY Ident. no. 6629805	M12 × 1 Safety I/O Port 
	**Note** Power supply cable (example): RKM52-1-RSM52 Ident. no. 6914149	7/8″ Power Supply 

Edition • 2025-02-26T11:57:04+01:00

Module Status LED

LED	Color	Status	Description
ETH1 / ETH2	Green	On	Ethernet Link (100 Mbps)
		flashing	Ethernet communication (100 Mbps)
		Off	No Ethernet link
BUS	Green	On	Active connection to a master
		flashing	Ready
	Red	On	IP-address conflict or Restore Mode or Modbus timeout
		flashing	Blink/Wink command active
	Red/Green	Alternating	Autonegotiation or waiting for DHCP/Boot-P addressing
ERR	Green	On	Diagnostics disabled
	Red	On	Diagnostics enabled
PWR	Green	On	V_1 power supply OK
		Off	V_1 power supply off or below defined threshold of 18 V

LED Status I/O

LED	Color	Status	Description
0…7	Green	On	Channel active
		flashing	Self test
	Red	On	Discrepancy
		flashing	Cross circuit
8…15	Green	On	Channel active
		flashing	Self test (input only)
	Red	On	Discrepancy, overload (output only)
		flashing	Cross circuit


Edition • 2025-02-26T11:57:04+01:00

Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.

Edition • 2025-02-26T11:57:04+01:00

Accessories

Type code	Ident no.		Dimension drawing
TB-SG-L	100014865	Protective housing for TBEN-L and TBIL-M block I/O modules for use in ATEX Zone 2/22	

Edition • 2025-02-26T11:57:04+01:00