


# BIM-M12E-AP4X-H1141

## Magnetic Field Sensor – Magnetic-inductive Proximity Sensor





### Technical data

|  |                                       |
|--|---------------------------------------|
| Type                                   | BIM-M12E-AP4X-H1141                   |
| ID                                     | 1579913                               |
| <b>General data</b>                    |                                       |
| Rated switching distance               | 90 mm                                 |
|  | In conjunction with magnet DMR31-15-5 |
| Repeat accuracy                        | ≤ 0.3 % of full scale                 |
| Temperature drift                      | ≤ ±15 %                               |
| Hysteresis                             | 1...10 %                              |
| <b>Electrical data</b>                 |                                       |
| Operating voltage $U_B$                | 10...65 VDC                           |
| Ripple $U_{ss}$                        | ≤ 10 % $U_{Bmax}$                     |
| DC rated operating current $I_o$       | ≤ 200 mA                              |
| No-load current                        | ≤ 15 mA                               |
| Residual current                       | ≤ 0.1 mA                              |
| Isolation test voltage                 | 0.5 kV                                |
| Short-circuit protection               | yes/Cyclic                            |
| Voltage drop at $I_o$                  | ≤ 1.8 V                               |
| Wire break/reverse polarity protection | yes/Complete                          |
| Output function                        | 3-wire, NO contact, PNP               |
| Switching frequency                    | 1 kHz                                 |
| <b>Mechanical data</b>                 |                                       |
| Design                                 | Threaded barrel, M12 x 1              |
| Dimensions                             | 62 mm                                 |
| Housing material                       | Metal, CuZn, Chrome-plated            |
| Active area material                   | Plastic, PBT-GF30                     |
| Max. tightening torque of housing nut  | 10 Nm                                 |
| Electrical connection                  | Connector, M12 x 1                    |

### Features

- Threaded barrel, M12 x 1
- Chrome-plated brass
- Rated operating distance 90 mm with DMR31-15-5 magnet
- DC 3-wire, 10...65 VDC
- NO contact, PNP output
- Male connector, M12 x 1

### Wiring diagram




### Functional principle

Magnetic inductive proximity sensors are actuated by magnetic fields and are thus capable of detecting permanent magnets through non-ferromagnetic materials (e.g. wood, plastic, non-ferrous metals, aluminium, stainless steel). Thus it is possible to achieve large switching distances even with smaller housing styles. In combination with the actuation magnet DMR31-15-5 TURCK sensors feature a relatively high switching distance. Thus there are multiple detection possibilities, particularly if the mounting space is limited or other difficult sensing conditions prevail.

Technical data

| Environmental conditions |  |
|--------------------------|--|
| Ambient temperature      | -25...+70 °C                               |
| Vibration resistance     | 55 Hz (1 mm)                               |
| Shock resistance         | 30 g (11 ms)                               |
| Protection class         | IP67                                       |
| MTTF                     | 2283 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state          | LED, Yellow                                |

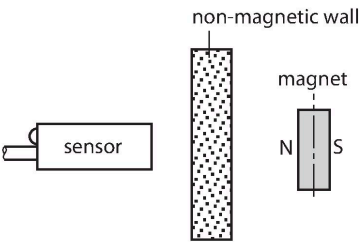

Mounting instructions

| Mounting instructions/Description |                                |
|-----------------------------------|--------------------------------|
|                                   | Diameter active area B Ø 12 mm |

Accessories

|                       |  |
|-----------------------|--|
| <b>DMR20-10-4</b><br> | <b>6900214</b><br>Actuation magnet; Ø 20 mm (Ø 4 mm), h: 10 mm; attainable switching distance 59 mm on BIM-(E)M12 magnetic field sensors or 50 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 3...4 mm |
| <b>DMR31-15-5</b><br> | <b>6900215</b><br>Actuation magnet, Ø 31 mm (Ø 5 mm), h: 15 mm; attainable switching distance 90 mm on BIM-(E)M12 magnetic field sensors or 78 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 3...5 mm |
| <b>DMR15-6-3</b><br>  | <b>6900216</b><br>Actuation magnet, Ø 15 mm (Ø 3 mm), h: 6 mm; attainable switching distance 36 mm on BIM-(E)M12 magnetic field sensors or 32 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 3...4 mm  |
| <b>DM-Q12</b><br>     | <b>6900367</b><br>Actuator, rectangular, plastic, attainable switching distance 58 mm on BIM-(E)M12 magnetic field sensors or 49 mm on BIM-EG08 magnetic field sensors; for Q25L linear position sensors: recommended distance between the sensor and magnet: 3...5 mm               |
| <b>BSS-12</b><br>     | <b>6901321</b><br>Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene   |
| <b>MW12</b><br>       | <b>6945003</b><br>Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)   |

Accessories

| Dimension drawing | Type        | ID      |   |
|-------------------|-------------|---------|---|
|                   | RKC4T-2/TEL | 6625010 | Connection cable, M12 female connector, straight, 3-pin, cable length: 2 m, jacket material: PVC, black; cULus approval |

