


BWS8151-0 Field-Wireable Connector Female Connector M12 × 1, Straight



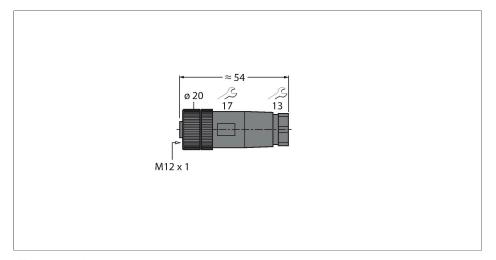

Technical data

Туре	BWS8151-0
ID	6904620
Connector A	Female, M12 × 1, Straight, B-coded
Number of pins	5
Contacts	CuZn, Optalloy Coating
Contact carriers	Plastic, PA, Black
Connector body	Plastic, PA, Black
Coupling nut/screw	Plastic, PA, Black
Seal	Plastic, FPM/FKM
Screw-in thread	PG7
External diameter of the cable	46 mm
Core cross-section/Clamping ability	0.140.75 mm²
Connection mode	Screw/clamp connection
Mechanical lifespan	> 500 Mating cycles
Protection class	IP67, (screwed together)
Electrical properties at +20 °C	
Rated voltage	60 V
Current	4 A
Insulation resistance	≥ ≥ 10° Ω
forward resistance	≤ 8 mΩ
Mechanical and chemical properties	
Ambient temperature (fixed)	-25+85 °C
Approvals	cULus recognized











■Metal coupling nut ■Protection class IP67

Screw-clamp terminal

■ B-coding

■5-pin

■PG7 screw-in thread

■ Cable feedthrough 4.0...6.0 mm

Contact assignment

