

CABLE4X0.34-XX-PVC-BK-100M/TEL

Actuator and Sensor Cable, PVC
Bulk Cable

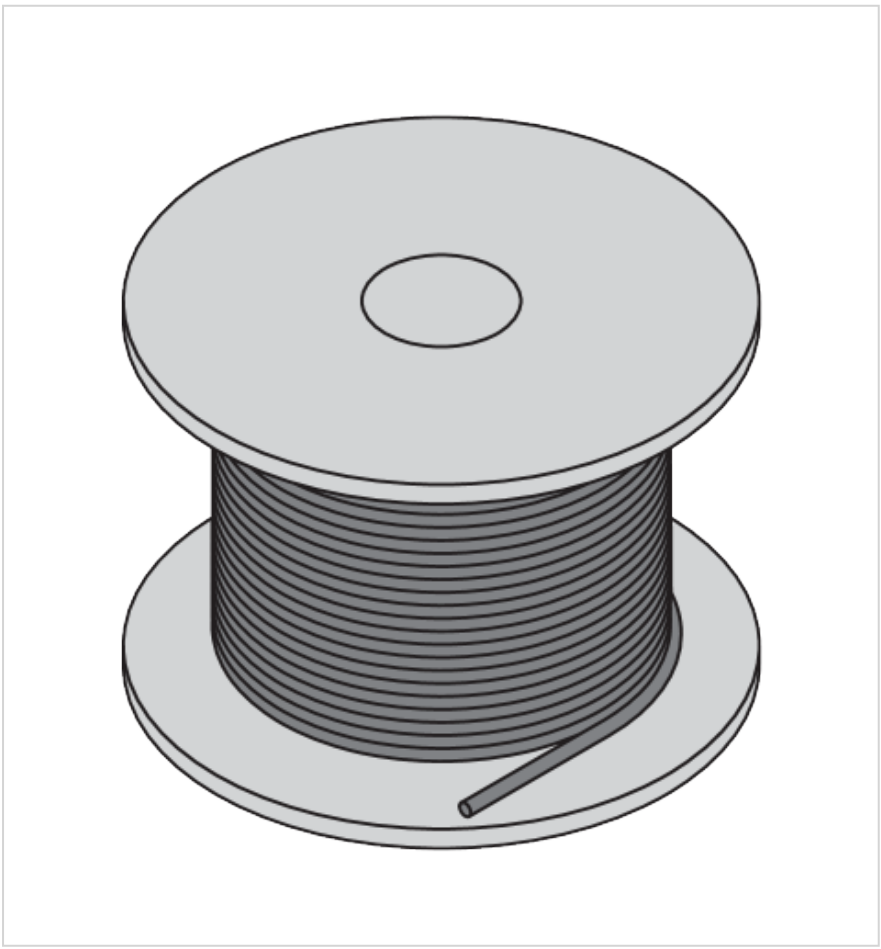

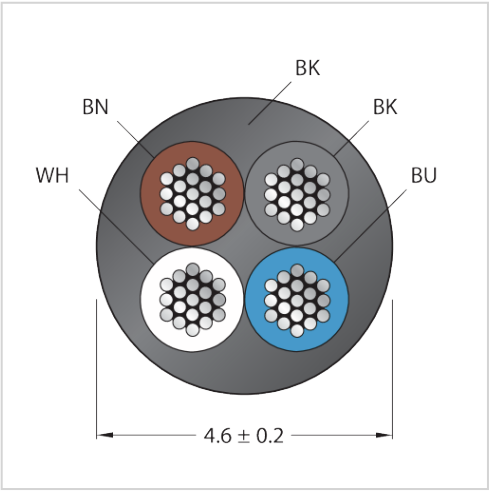

Type designation	CABLE4X0.34-XX-PVC-BK-100M/TEL
Ident-No.	6627986

Technical data

Electrical data	
Current	4 A
Rated voltage	300 V
forward resistance	max.57 Ω/km
Insulation resistance	>30,5 MΩ/km
Test voltage	2000 V
Mechanical data	

Features

- 4-pin
- Jacket material: PVC
- Jacket color: black
- Resistant to chemicals and oils
- Flame retardant
- Resistant to acids and alkaline solutions
- Resistant to microbes and hydrolysis
- LABS free
- Protection class: IP67, IP69K
- Cable length: 100 m


| 09-09-2026 09:09 | Subject to technical changes |

Technical data

Bending radius (stationary installation)	≥5 x Ø
Bending radius (flexible use)	≥10 x Ø
Connector A	
Number of Pins	4
Cable	
Cable diameter	4,7 mm ±0.20
Cable length	100 m
Cable jacket	PVC, Black
Core insulation	PVC
Core cross-section	4 x 0,34 mm²
Arrangement of strands	42 x 0,1 mm
Core colors	BN, WH, BU, BK
Ambient conditions	
Ambient temperature (mobile)	-5...+80 °C
Ambient temperature (fixed)	-40...+105 °C
Comments	
Packaging unit	1


Mounting accessories

TORQUE-WRENCH-SET-AS	**6936170**
	Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)

BLANK-LABEL-FOR-CORDSETS-TEL-TXL	**6936206**
	Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant

| 09-09-2026 09:09 | Subject to technical changes |

Connection accessories

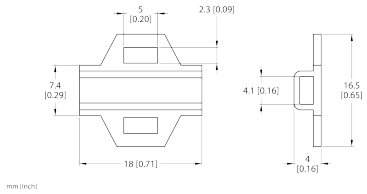LABEL-HOLDER-FLEX-PVC	100048170
	PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package

| 09-09-2026 09:09 | Subject to technical changes |