
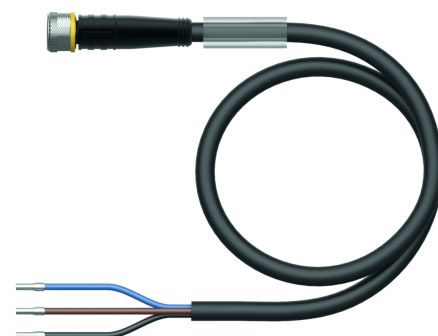


PKG3M-40/TXL

Actuator and Sensor Cable, PUR Connection Cable

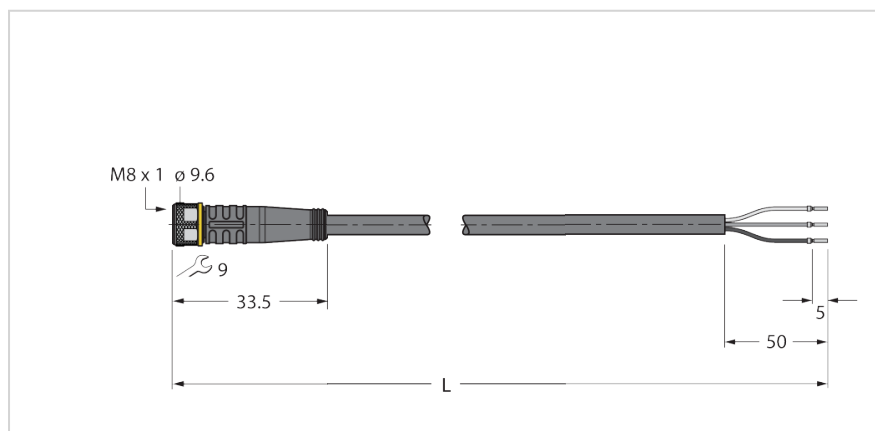

Type designation	PKG3M-40/TXL
Ident-No.	6633476

Technical data

General data	
Special features	Suitable for drag chain use
Electrical data	
Current	4 A
Rated voltage	50 V _{AC} /60 V _{DC}
forward resistance	max.57 Ω/km
Insulation resistance	>30,5 MΩ/km
Test voltage	2000 V
Mechanical data	
Bending radius (stationary installation)	≥5 x Ø
Bending radius (flexible use)	≥10 x Ø
Bending cycles	≥5 Mio.
Admissible acceleration	max. 5 m/s ²
Admissible travel path, horizontal	5 m (at 5 ;m/s ²)
Admissible travel path, vertical	2 m (at 5 m/s ²)
Admissible traversing speed	3,3 m/s
Torsional stress	±180 °/m
Connector A	
Mechanical lifespan	> 100 Mating cycles



Features

- Female M8, straight, 3-pin
- Jacket material: PUR
- Jacket color: black
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (FT2 acc. to UL 1581, IEC 60332-2-2)
- Resistant to welding sparks
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 40 m


Technical data

Connector A	Female, M8 x 1, Straight
Number of Pins	3
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector body	Plastic, TPU, Black
Coupling nut/screw	Brass, CuZn, Nickel-plated
Seal	Plastic, FPM/FKM
Pollution degree	3
Protection class	IP67, IP69K, Only in screwed condition
Cable	
Cable diameter	4,1 mm ±0.20
Cable length	40 m
Cable jacket	PUR, Black
Core insulation	PP
Core cross-section	3 x 0,34 mm²
Arrangement of strands	42 x 0,1 mm
Core colors	BN, BU, BK
Ambient conditions	
Ambient temperature (mobile)	-25...+80 °C
Ambient temperature (fixed)	-50...+80 °C
Ambient temperature (drag chain)	-25...+60 °C
Tests/approvals	
Approvals	cULus
Comments	
Packaging unit	1

Cable Cross-Section

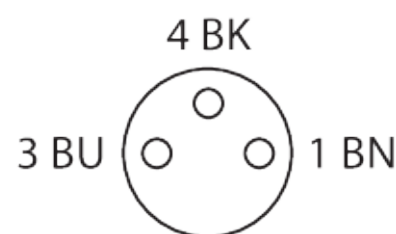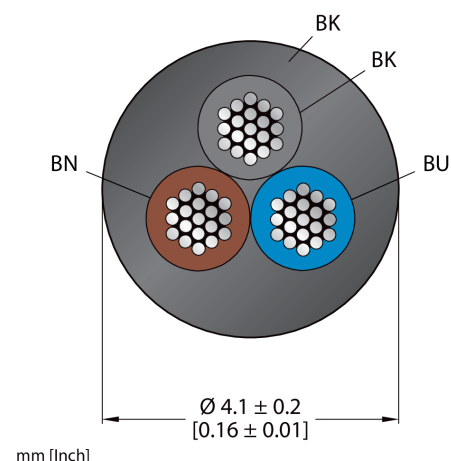

Circuit Diagram



Mounting accessories


TORQUE-WRENCH-SET-AS 6936170

Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)





BLANK-LABEL-FOR-CORDSETS-TEL-TXL

6936206

Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant



Mounting accessories

HAS5131-0	6905402	Field-wireable male connector, M8 × 1, straight, 3-pin, insulation piercing connection, cable feedthrough 2.5 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut
		
HS5131-0	6902710	Field-wireable male connector, M8 × 1, straight, 3-pin, pressfit technology, cable feedthrough 4.0 to 5.0 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut
		
BS5133-0	6901012	Konfektionierbarer Stecker, M8 x 1, gerade, 3-polig, Schraubklemmanschluss, Leitungsdurchlass 3.5 bis 5.0 mm, Aderquerschnitt/ Klemmvermögen 0.14 bis 0.50 mm², Kunststoffgehäuse, Metallüberwurfschraube
HS5231-0	6902810	Field-wireable male connector, M8 × 1, angled, 3-pin, pressfit technology, cable feedthrough 4.0 to 5.0 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut
		
FW-PRKPM0320-SA-S-0406	100002292	Field-wireable female connector, M8 × 1, straight, 3-pin, screw terminal connection, cable feedthrough 4.0 to 5.5 mm, core cross-section/terminal capacity 0.14 to 0.5 mm², plastic housing, metal coupling nut
		

Connection accessories

LABEL-HOLDER-FLEX-PVC	100048170	PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package
